


HOW TO DETERMINE YOUR RING SIZE

CONFIRM PRINTED PAPER SIZE




1. **Ring measurements are very precise.** Carefully follow these instructions to obtain an accurate measurement.
2. **Prior to printing,** ensure that Page Scaling is set to "None" on your print dialog box. (To open the print dialog box, press CTRL+P.)
3. **Measure the bar on the left.** It must be exactly 1 inch or 30 mm long. Alternately, place a quarter where indicated. The quarter should fit completely over the image so that all lines are covered, without the quarter hanging over any edges.

MEASURE CURRENT RING

1. Select a ring that properly fits the intended finger.


Engagement and wedding rings are traditionally worn on the ring finger on the left hand in the United States.

2. Place the ring over the circles below, matching the inside edge of the ring to the circle nearest in size. This measurement refers to the inside *diameter* of the ring.

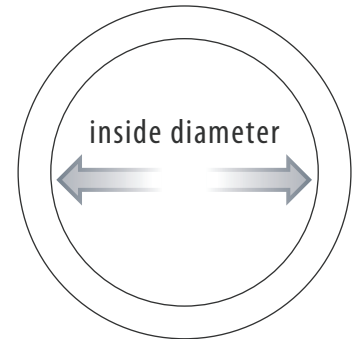


MEASUREMENTS MATCH THE
INSIDE EDGE OF THE RING

3. If the ring falls between two sizes, order the larger size.


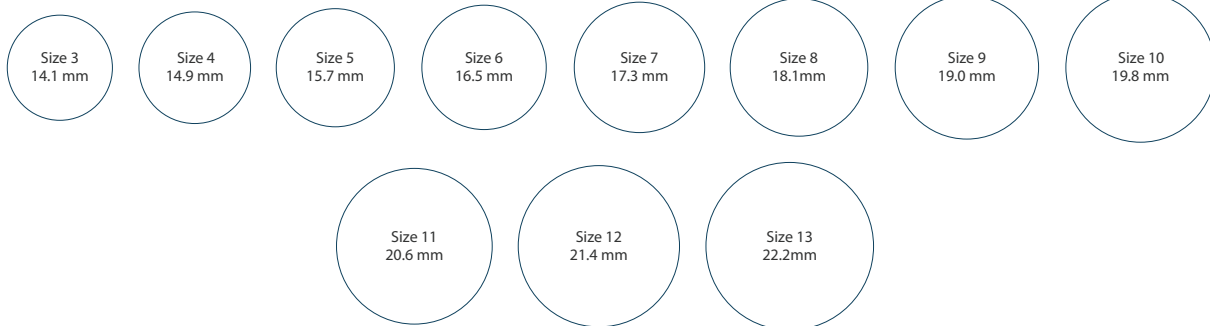


MEASUREMENTS REFLECT RING SIZES IN THE US AND CANADA


MEASURE YOUR FINGER

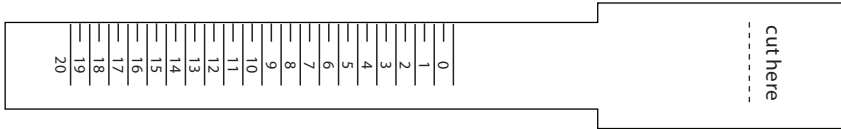

1. Print it—make sure to uncheck the “fit to page” option on your print command screen.
2. Cut out the sizer.
3. Make a slot in the sizer by cutting along the dotted line.
4. Roll the sizer into a circle with the numbers on the outside.
5. Insert the end of the tab into the slot.
6. Place the sizer around your finger and pull the tab through the slot until the paper is snug around your finger.
7. Read your finger size on the scale.



In this example,
the ring size is **17**



In this example,
the ring size is **17 1/2**